


STONE PINE

ZI: Mostly sound knots, small black knots possible, knotholes are professionally filled, occasional sapwood, occasional resin pockets and pith ray possible, contrasting colour variations possible, lamellas are jointfree placed.

Bottom layer C+: Stone-pine, no special quality specifications, filled surface.

This panel is also available with a gluing adapted to wet areas (sauna) and is therefore in accordance with the emission requirements according to ONORM M6219-1:2010 for the use in sauna areas (see information "Admonter Element's in sauna areas" at <http://www.admonter.at/en/downloads/>).

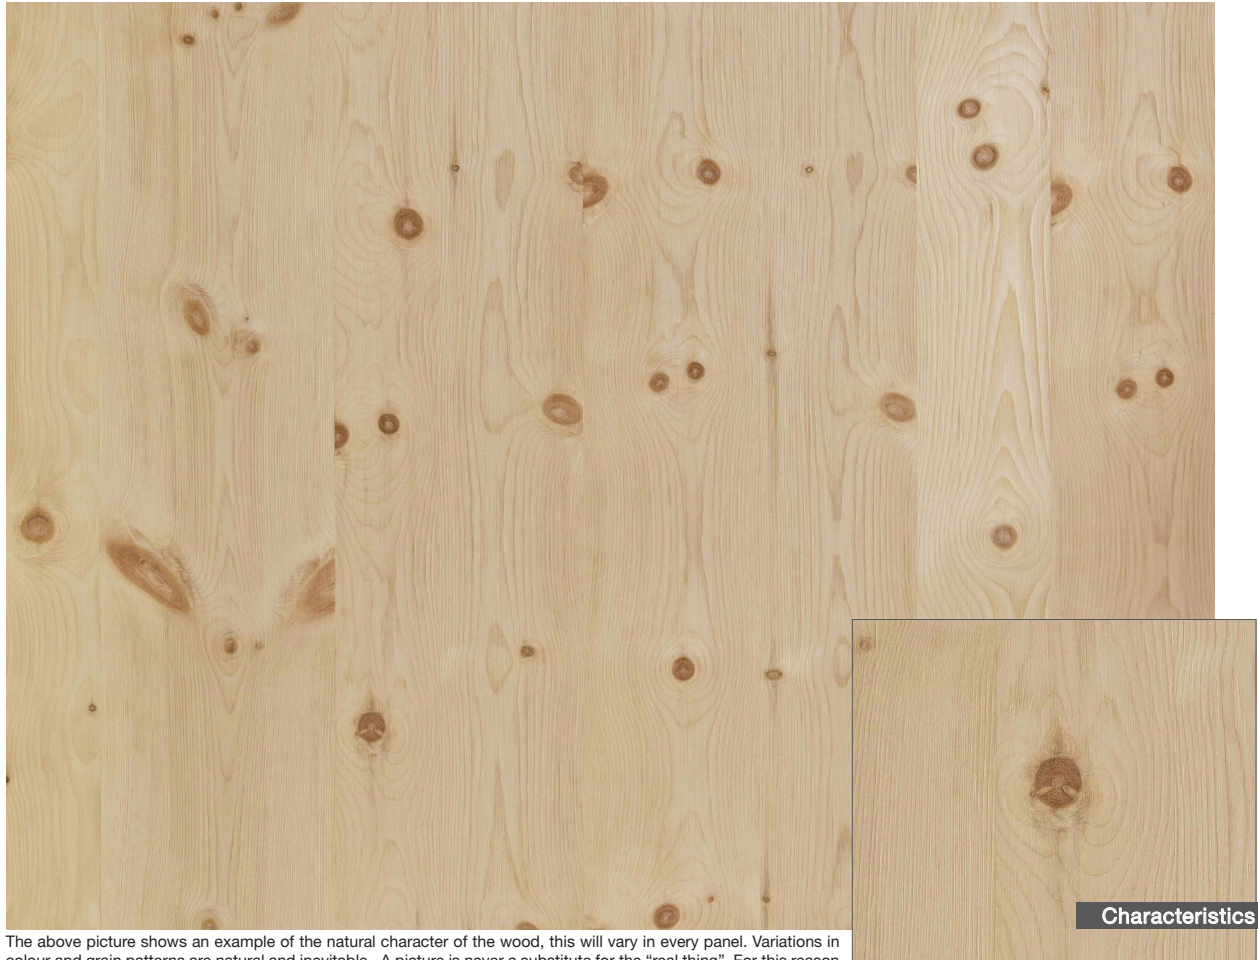

The above picture shows an example of the natural character of the wood, this will vary in every panel. Variations in colour and grain patterns are natural and inevitable. A picture is never a substitute for the "real thing". For this reason we recommend a visit to your nearest Admonter dealer. He will be pleased to show you samples.

STIA Norm	Thickness mm app.	Length mm (Width 2030)	Top layer thickness mm	Top layer width mm	Middle layer	Packaging pack./palett
ZI/C+ (also available to wet areas (sauna))	19	2100-4500 (subject to availability)	3,4	Mix	SML Spruce	30
ZI/ZI	40	2100/2500	3,4	Mix	Spruce 5-layer	10

SWP/3 non structural (ns): Solid wood panels for non-structural use in wet areas.

Legend: SML = strip core, BML = board middle layer.