


# ROBINIA DARK



### Initial care - with Admonter maintenance oil

You can find more information in the Admonter care- and laying instructions and at [www.admonter.eu/en/downloads/](http://www.admonter.eu/en/downloads/)

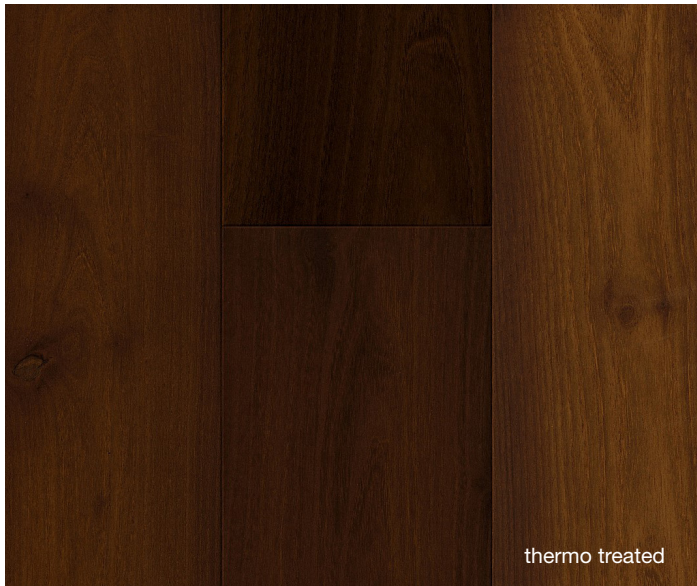

### Admonter Natural Floor on under-floor-heating-system

Admonter Natural Floors are ideally suited for under-floor heating systems. We recommend hot-water underfloor heating systems set at low temperature. The surface temperature of 29°C must not be exceeded. Beech is not suitable for under-floor heating systems! We suggest that our products ideally are fully glued down for best results with Admonter elastic adhesive. However, like all engineered boards our planks can be laid as a floating installation (except 2-layer floors and 3-layer floors small (SF-RS), they have to be fully glued down).

More information at [www.admonter.at](http://www.admonter.at) or contact your specialist dealer.

**Skirting:** Typ2, Typ3 white, Typ4

Grading	Thickn. mm	Width mm	Length mm	Installation and construction			Surface	Texture
				Tongue & groove		lock-it		
basic	10	100	1000	2-layer	-	-	ng, uv	sanded, brushed
	10	154	2000	-	-	2-layer	natural oil	sanded, brushed
	13	118	1200	-	-	3-layer <sup>SF-RS</sup>	ng, uv, ml	sanded, brushed
	15	138	1850/2000	-	3-layer <sup>NH-RS</sup>	3-layer <sup>NH-RS</sup>	ng, uv, ml	sanded, brushed
	15	154	1850/2000	-	3-layer <sup>NH-RS</sup>	3-layer <sup>NH-RS</sup>	ng, uv, ml	sanded, brushed
rustic	10	120	1200	2-layer	-	-	natural oil	sanded, brushed
	13	118	1200	-	-	3-layer <sup>SF-RS</sup>	ng, uv	sanded, brushed
	15	138	1850/2000	-	3-layer <sup>NH-RS</sup>	-	ng, uv	sanded, brushed, antico
	15	154	1850/2000	-	3-layer <sup>NH-RS</sup>	3-layer <sup>NH-RS</sup>	ng, uv	sanded, brushed, antico

Please note: antico surface texture: available with ng + tongue & groove + 3-layer<sup>NH-RS</sup>

### Technical information

Wood species	Thickness mm	Weight (kg/m <sup>2</sup> )	Moisture content (%)	Lambda	d-Value	Hardness	Fire classification
Robinia dark*	10	6,6 / 6,8	5+/-2 / 5+/-2	0,15 / 0,15	0,067 / 0,073	48 / 48	C <sub>fl</sub> -s1
Robinia dark	13	7,3	5+/-2	0,15	0,087	48	C <sub>fl</sub> -s1
Robinia dark	15	9,0	5+/-2	0,14	0,107	48	C <sub>fl</sub> -s1

**LH-RS:** Hardwood-backing / **NH-RS:** Softwood-backing

**SF-RS:** Softwood-veneer-backing, **ng:** natural oiled / **uv:** UV oiled / **ml:** matt lacquer

\* Length 1000 or 1200 mm / Length 2000 mm

For more information visit our

website [www.admonter.at](http://www.admonter.at)

February 2015

